


CHOKE & KILL HOSE

Choke & Kill

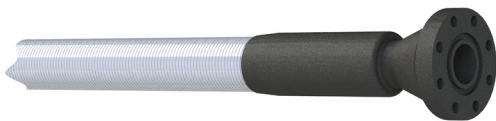

Applications

Flexible choke and kill lines that require API 16C certification. The tube is specially compounded to resist abrasion, corrosion, oil, drilling mud, methane and H2S.

Features

- Survival temperature is 350°F (177°C) for 1 hour per API 16C (2nd Edition) B.12.5.
- Available in various sizes and pressures.
- 18 month warranty. 6 Month Storage + 12month field service warranty.
- Temperature: -29°C to +121°C.

							
mm	inch	mm	inch	bar	psi	mm	kg/m
64	2 1/2	131	5.14	689	10,000	1,219	20.6
76	3	143	5.64	689	10,000	1,219	23
89	3 1/2	154	6.05	689	10,000	1,372	24.6

